


# WIDEX CLEAR™440 RIC WITH M-RECEIVER AND **C-ISP**



One model suits all. The ultra small WIDEX CLEAR™440 RIC model with the M-receiver features the new C-ISP platform and unique Widex wireless technology.

Minimal to moderately severe hearing losses.

## SUGGESTED FITTING RANGE

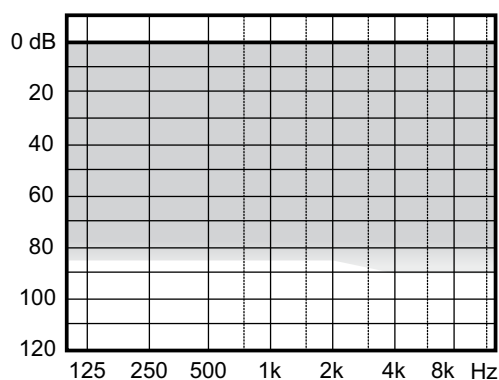

## RIC FEATURES

- M-receiver
- 9.6 kHz bandwidth
- Stable Sound Delivery
- Sound Harmony
- Closed, vented and open fittings
- Instant and Custom receiver ear-tips

## C-ISP PLATFORM

- WidexLink™
- InterEar
- EcoTech III
- Dynamic Integrator™
- 15 frequency bands
- 15 compression channels

## MAIN SIGNAL PROCESSING FEATURES

- InterEar TruSound compression system with EDRC
- TruSound Softener
- HD Locator™
- Digital Pinna
- InterEar Speech Enhancer
- InterEar Feedback Cancelling
- Audibility Extender™

## USER FEEDBACK AND CONTROL

- SmartSpeak
- SmartTone
- InterEar Partner Alarm
- Battery alarm
- LED
- InterEar program shift (+via RC-/M-DEX)
- InterEar volume control (via RC-/M-DEX)

## INPUTS

- Phone+
- InterEar Zen
- WidexLink™ audio transmission


## ACCESSORIES

- RC-DEX, M-DEX and TV-DEX

# C4-FS


## MAXIMUM OUTPUT - EAR SIMULATOR

IEC 60118-0

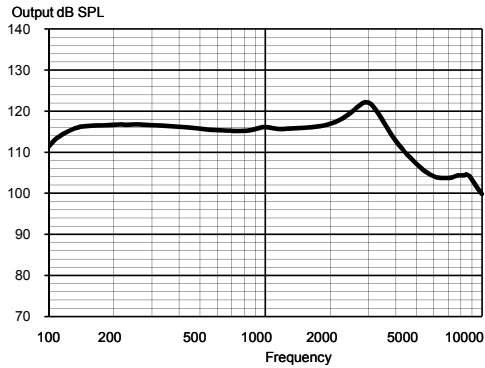


## MAXIMUM OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2003

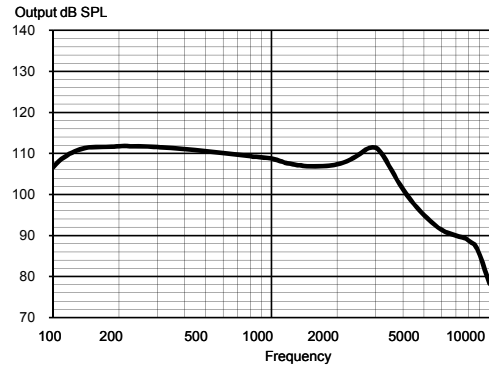


## OUTPUT - EAR SIMULATOR

IEC 60118-0

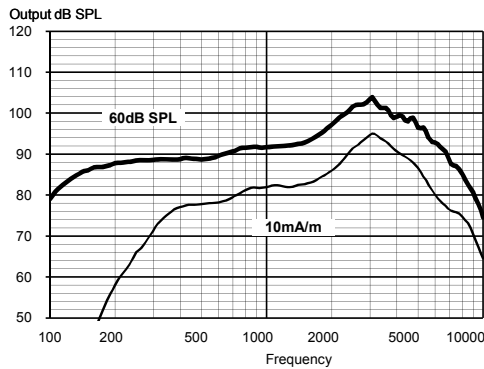

## OUTPUT - 2CC COUPLER

IEC 60118-7 / ANSI S3.22-2003

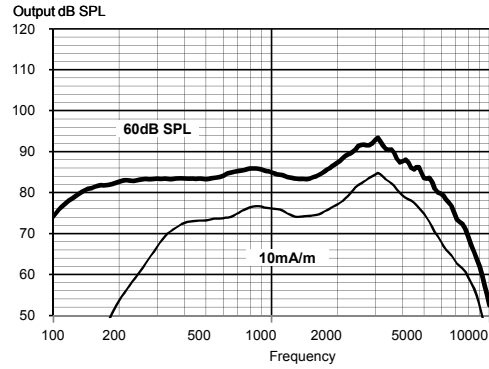

## Technical data

Typical data obtained through standard pure tone measurements.  
Hearing aid set to Compass Test mode 1, unless stated otherwise.  
Measured using a standard ITE coupler.

		IEC 60118-0	ANSI S3.22-2003 / IEC 60118-7
OSPL90	2500 Hz	120 dB SPL	110 dB SPL
	Peak	122 dB SPL	112 dB SPL
	Average	116 dB SPL	109 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz	102 dB SPL	91 dB SPL
	Peak	104 dB SPL	93 dB SPL
	Average	92 dB SPL	87 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz	69 dB	59 dB
	Peak	71 dB	60 dB
	Average	63 dB	57 dB
Telecoil output (Input 10 mA/m)	2500 Hz	93 dB SPL	84 dB SPL
	Peak	95 dB SPL	86 dB SPL
	Average	83 dB SPL	78 dB SPL
Frequency range		100 Hz - 9600 Hz	100 Hz - 8200 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz	0.4%	0.3%
	800 Hz	0.4%	0.2%
	1600 Hz	0.5%	0.4%
Equivalent input noise		20 dB SPL	23 dB SPL
Battery drain (stand by)		1.16 mA	1.16 mA
Battery drain		1.17 mA	1.18 mA
Battery life / hours (Type 312 Zn-Air, 145 mAh)		125 (>105)	125 (>105)
Mobile phone immunity		IRIL: -15/-10 dB SPL	U-rating: M3 / T3

