

# mind220 m2-m

## Digital micro-BTE with Dual ISP



mind220 is based on the exclusive Widex Integrated Signal Processing platform - Dual ISP


mind220 is the first easily affordable hearing aid on the market to feature Audibility Extender and SmartSpeak

Minimal to moderately severe hearing losses

### Dual Integrated Signal Processing

- 5 frequency bands
- 5 compression channels
- 5 channel HD Locator™ \*
- Audibility Extender™
- Multi-directional Active Feedback Cancelling \*
- EDRC (Enhanced Dynamic Range Compression)
- Noise reduction (SIS)
- Zen fractal generator
- SmartSpeak™ generator
- SmartTone generator
- Up to 3 listening programs
- Optional remote control
- Optional program button

### Suggested fitting range

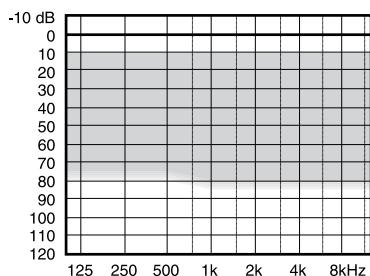


\* In selected models the HD Locator is always set in fixed omni mode. These models use Active Feedback Cancelling.

# mind220 m2-m

## Maximum output - Ear simulator

IEC 60118-0


Output dB SPL

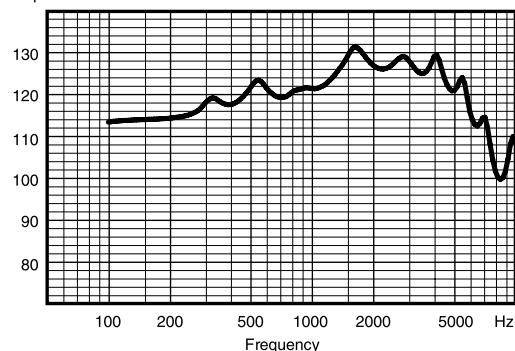

## Maximum output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003


Output dB SPL

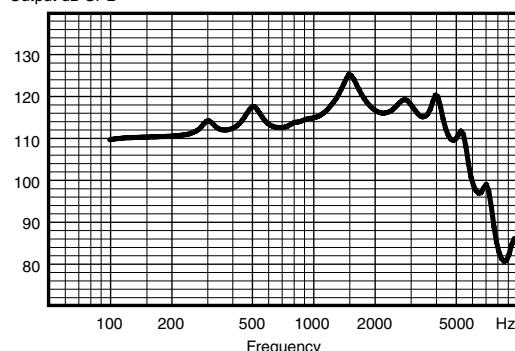

## Output - Ear simulator

IEC 60118-0


Output dB SPL

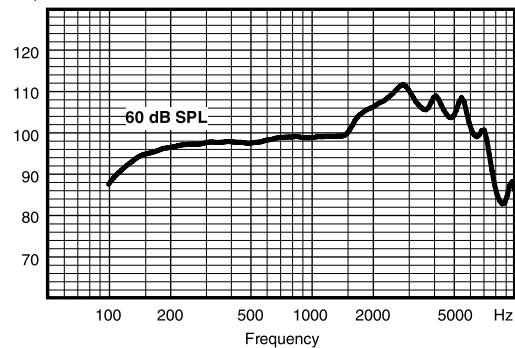

## Output - 2cc coupler

IEC 60118-7 / ANSI S3.22-2003

Output dB SPL

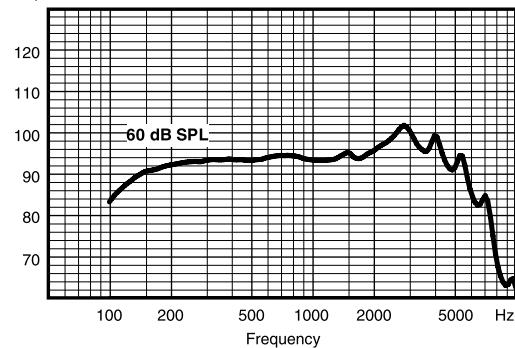

## Technical data

Typical data obtained through standard pure tone measurements.

Hearing aid set to Compass Test mode 1, unless stated otherwise.

Measured using a normal hook and standard BTE coupler.

		IEC 60118-0	ANSI S3.22-2003 / IEC 60118-7
OSPL90	2500 Hz Peak Average	128 dB SPL 132 dB SPL 124 dB SPL	117 dB SPL 126 dB SPL 119 dB SPL
Acoustic output (Input 60 dB SPL)	2500 Hz Peak Average	110 dB SPL 112 dB SPL 101 dB SPL	99 dB SPL 102 dB SPL 96 dB SPL
Max gain (Input 50 dB SPL, Compass Max gain test mode)	2500 Hz Peak Average	66 dB 67 dB 57 dB	56 dB 58 dB 52 dB
Frequency range		100 Hz - 8100 Hz	100 Hz - 7700 Hz
Harmonic distortion (Input 70 dB SPL)	500 Hz 800 Hz 1600 Hz	2% 2.6% 0.2%	1.7% 2.2% 0.2%
Equivalent input noise		20 dB SPL	23 dB SPL
Battery drain (stand by)		0.8 mA	0.8 mA
Battery drain		0.8 mA	0.8 mA
Battery life / hours (Type 10 Zn-Air, 90 mAh)		115 (>90)	110 (>90)
Mobile phone immunity		IRIL: -37/-10 dB SPL	U-rating: M3

